

**HOTO**  
INSTRUMENTS®

3100 Dundee Road, Suite 707, Northbrook, IL 60062  
 1-866-527-4666 • 847-564-2260 Fax: 847-564-0495  
 www.hoto-instruments.com • E-mail: info@hoto-instruments.com  
 ISO 9001 Registered ISO/IEC 17025 Accredited

# Digital Tachometer/Length Meter

Model	EHT-600	EHT-601	EHT-602	EHT-603
Tach, cone & funnel adapters, carrying case	●	●	●	●
12" Wheel	—	—	●	●
4-AA rechargeable batteries & charger	—	●	—	●

EHT-600 Kit



The EHT-600 tachometer features exceptional resolution at low speeds and statistics. It also features four measuring modes: Real time displays the current value, Maximum displays the highest value, Minimum displays the lowest value and Mean displays the average value taken during the test. It's built with an ergonomic metal housing and operates on two standard AA batteries.

- Rugged metal housing
- Ergonomic design fits comfortably in your hand and lessens fatigue
- Four measuring modes: Real time, maximum, minimum and mean
- Auto measuring range of 0 to 25,000 rpm with up to 0.01 rpm resolution up to 2,000 fpm using the optional 12" wheel
- 15 different measuring units: RPM, rev/sec, FPM, in/min, yd/min, in/sec, m/min, cm/min, cm/sec, revolutions, ft, in, yd, m, cm
- Last reading recall and 99 data memory
- Auto statistics: Max, Min and Mean
- Easy-to-read 5 digit 0.47" (12 mm) high LCD
- Low battery indicator




Measure speed or revolutions



Measure surface speed and distance with optional 12" wheel



Specifications	
<b>Measuring Range</b>	0.40 - 25000 RPM (floating decimal point) 0.40 - 2000.0 ft/min (w/12" wheel)
<b>Accuracy</b>	0.01% of reading ± 1 digit
<b>Display</b>	5 digit LCD 12mm Character Height
<b>Measuring Unit*</b>	Speed Mode: RPM, rev/sec, FPM, in/min, yd/min, in/sec, m/min, cm/min, cm/sec Counter Mode: revolutions, ft, in, yd, m, cm
<b>Measuring Mode</b>	MEAN, MAX, MIN (speed measure mode)
<b>Memory</b>	Short Term Auto Memory: MAX, MIN, MEAN and last 9 data Long Term On-Demand memory: 99 data
<b>Display Update</b>	0.5 sec or 1.0 sec selectable
<b>Power</b>	2 - AA Battery, Approx. 80 hrs continuous operation
<b>Indicators</b>	LOW BATT, Units, MAX, MIN, MEAN and memory location
<b>Operating Temp.</b>	0 - 45°C (32 - 113°F)
<b>Construction</b>	Die-cast aluminum housing
<b>Standard Accessories</b>	Cone adapter, funnel adapter, 2-AA Batteries, NIST traceable Certificate
<b>Optional Accessories</b>	12" wheel (surface speed measuring wheel is necessary to measure linear speed), 3-1/2" Extension Shaft .

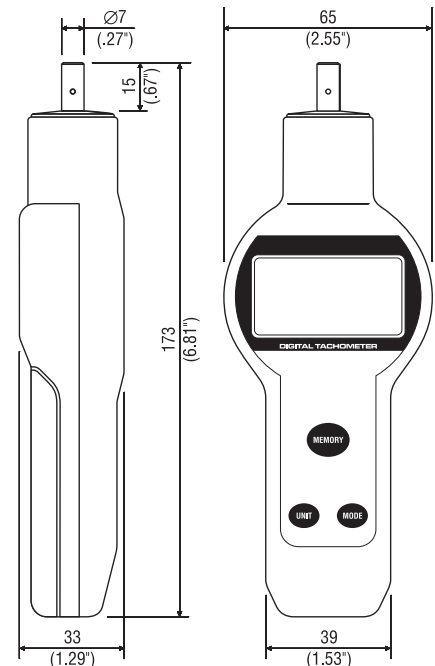

Specifications subject of change without notice.