

<b>LINE:</b>	<b>MOBILE RECEIVING SCALES</b>
--------------	--------------------------------

<b>MODEL:</b>	<b>EQM-200/400, EQM-400/800 &amp; EQM-1000/2000</b>
---------------	---



<b>USE</b>	<b>CAPACITIES AND DIMENSIONS</b>			
<ul style="list-style-type: none"> <li>• All industry in general</li> <li>• Storage companies</li> <li>• Markets</li> <li>• Shipping departments</li> <li>• Supermarkets</li> <li>• House hold suppliers</li> <li>• Steel and aluminum foundries</li> <li>• Office suppliers</li> <li>• Manufacturers</li> <li>• Etc</li> </ul>	<b>MODEL</b>	<b>Capacity</b>	<b>Minimum division</b>	<b>Plate Dimensions</b>
	EQM-200/400	200 kg/ 400 lb	50 g / 0.1 lb	68 X 83 cm (27 X 32" IN)
	EQM-400/800	400 kg/ 800 lb	100 g / 0.2 lb	68 X 83 cm (27 X 32" IN)
	EQM-1000/2000	1000 kg/ 2000 lb	200 g / 0.5 lb	73 X 98 cm (29 X 38" IN)

## BENEFITS

- Toggles between kilograms and pounds
- Easy to use
- PC or Printer communication function
- Operates with rechargeable battery (200 hours approximately) or electrical power supply

LINE:

# MOBILE RECEIVING SCALES

MODEL:

## EQM-200/400, EQM-400/800 & EQM-1000/2000

### BENEFITS



#### EASY TO USE

So simple to use that anyone can operate it with only a minute training



#### BUILT TO LAST

Its solid structure and design, guarantee years of continuous operation, trouble free

### SPECIFICATIONS

	EQM-200/400	EQM-400/800	EQM-1000/2000
Capacity	200 kg/ 400 lb	400 kg/ 800 lb	1000 kg/ 2000 lb
Minimum division	50 g/ 0.1 lb	100 g / 0.2 lb	200 g/ 0.5 lb
Display	Liquid Crystal Display		
Backlight	Included		
Power Supply	110 v/60 hz (220 v/50 hz Optional)		
Power supply adapter	Included		
Car lighter adapter	Optional		
Serial port	RS-232		
Rechargeable Battery	Included (200 hours approximately)		
Maximum tare	100 kg/ 200 lb	200 kg/ 400 lb	500 kg/ 1000 lb
Plate Dimensions	68.5 x 83.18 cm (27 x 32 3/4" IN )		78.7x113.5 cm/ 29x44"IN
Operation temperature	-10 to 40 °C (14 to 104 °F)		
Storage Temperature	-20 to 50 °C (-4 to 122 °F)		
Net weight	64 kg/ 141 lb	64 kg/ 141lb	89 kg/ 196 lb
Shipping weight	81 kg/ 178.5 lb	81 kg/ 178.5lb	106 kg/ 233.3 lb



#### OPERATES ANYWHERE

A long lasting rechargeable battery allow the EQM to operate almost anywhere. Very mobile since it is equipped with wheels.



#### EASY TO READ DISPLAY


A backlight alphanumeric liquid crystal display enhance visibility even in dark areas.



#### OPTIONAL ACCESORIES



Stainless steel plate



Car lighter adapter to plug in the scale

#### OVERLOAD AND IMPACT PROTECTION

The shock-absorbing platform heavy duty steel construction, provides protection against overload and impact forces.



#### TWO SCALES IN ONE

Its rotating indicator module can be disassembled and the scale can work as a platform with remote indicator.




#### PC COMMUNICATION FUNCTION

Includes PC or printer interface through serial port RS-232



### DIMENSIONS

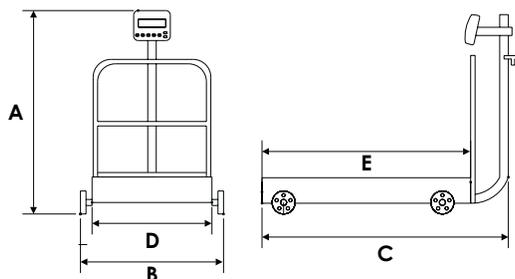

	EQM-200/400	EQM-400/800	EQM-1000/2000
A	116.3 cm/ 45.8" IN	116.3 cm/ 45.8" IN	116.3 cm/ 45.8" IN
B	81.8 cm / 32.2" IN	81.8 cm / 32.2" IN	84.4 cm/ 33.2" IN
C	95.7 cm / 37.6" IN	95.7 cm / 37.6" IN	113.5 cm / 44.7" IN
D	68.5 cm / 27" IN	68.5 cm / 27" IN	73.6 cm / 29" IN
E	80.6 cm / 31.7" IN	80.6 cm / 31.7" IN	95.8 cm/ 37.7" IN

#### ACCESSORIES INCLUDED:

Adapter for remote indicator mounting  
3 m (9.8 ft) extension cord.  
Assembly required



\*Available only in scales ordered under this spec

DISTRIBUTED BY

